

ON 423T



**ÜRÜN ADI:** ARC FLASH TULUM

**ÜRÜN KODU:** ON 423T

**KALİTE STANDARDI:** ISO 9001:2015

**ÜRÜN STANDARDI:** EN ISO 11612 A1-A2-B1-C1 EN ISO 11611  
EN 14116 -EN 1149-3 - IEC61482-1-2

**PRODUCT NAME:** ARC FLASH OVERALLS

**PRODUCT CODE:** ON 423T

**QUALITY STANDARD:** ISO 9001:2015

**PRODUCT STANDARD:** EN ISO 11612 A1-A2-B1-C1 EN ISO 11611  
EN 14116 - EN 1149-3 - IEC61482-1-2

0507 701 70 69 - info@ulasisguvenligi.com



ON 401



**ÜRÜN ADI:** ORTA GERİLİM DAHİLİ İZOLE SEHPA  
**ÜRÜN KODU:** ON 401  
**KALİTE STANDARDI:** ISO 9001:2015  
**ÜRÜN STANDARDI:** EN 60243-1  
**KULANIM GERİLİMİ:** 45kV  
**TEST GERİLİMİ:** 80kV  
**ÜST YÜZEY ÖLÇÜ:** 50 CM x 50 CM  
**YÜKSEKLİK:** 26 CM  
**AĞIRLIK:** 7 KG

**PRODUCT NAME:** MEDIUM VOLTAGE INSULATING  
PLATFORM (INDOOR) COMBINABLE  
**PRODUCT CODE:** ON 401  
**QUALITY STANDARD:** ISO 9001:2015  
**PRODUCT STANDARD:** EN 60243-1  
**USE VOLTAGE:** 45kV  
**TEST VOLTAGE:** 80kV  
**SIZE OF UPPER FLOOR:** 50 CM x 50 CM  
**HEIGHT:** 26 CM  
**WEIGHT:** 7 KG





## STANDARDS

These gloves are designed to protect hands against mechanical hazards as defined in PPE Regulation (EU) 2016/425. EN 60903: EN 60903 specifies the requirements for gloves and personal protective equipment (PPE) designed to protect against electrical hazards. This standard outlines testing methods and criteria for gloves made from rubber or similar insulating materials. It ensures that the gloves provide adequate protection for workers handling electrical equipment or working in electrical environments.

| Category     | Class | Length                    | Color     | Cuff | Maximum Operating Voltage (Volt) AC | Maximum Operating Voltage (Volt) DC |
|--------------|-------|---------------------------|-----------|------|-------------------------------------|-------------------------------------|
| Low Voltage  | 00    | 28 cm / 36 cm             | Red/Black | ST   | 500                                 | 750                                 |
|              | 0     | 28 cm/ 36 cm/41 cm /46 cm | Red/Black | ST   | 1,000                               | 1,500                               |
| High Voltage | 1     | 36 cm/ 41 cm/ 46 cm       | Red/Black | ST   | 7,500                               | 11,250                              |
|              | 2     | 36 cm/ 41 cm/ 46 cm       | Red/Black | ST   | 17,000                              | 25,500                              |
|              | 3     | 36 cm/ 41 cm/ 46 cm       | Red/Black | ST   | 26,500                              | 39,750                              |
|              | 4     | 36 cm/ 41 cm/ 46 cm       | Red/Black | ST   | 36,000                              | 54,000                              |

| Glove Category | Resistant |
|----------------|-----------|
| Class 00       | A, C, Z   |
| Class 0        | A, C, Z   |
| Class 1        | R, C      |
| Class 2        | R, C      |
| Class 3        | R, C      |
| Class 4        | R, C      |




FRANKLIN



**ÜRÜN ADI:** 20kV İZOLE ELEKTRİKÇİ AYAKKABI  
**ÜRÜN KODU:** FRANKLIN HRD052T  
**KALİTE STANDARDI:** ISO 9001:2015 - EUROPEAN  
DIRECTIVE 89/686/EEC  
**ÜRÜN STANDARDI:** EN 12568 - ISO 5423:92 - EN 344  
CSA Z KANADA STANDARDI - ASTM F2413-11 - EN ISO 20344  
EN ISO 20345 - EN ISO 13287 - CE  
**ÜRÜN ÖZELLİKLERİ:** SB - FO - E - P - WRU - HRO - SRC  
**KULLANIM VOLTAJİ:** ASTM F2413-11 20kV 1 DAKİKA  
C.S.A Z195 P.4.4 18kV 1 DAKİKA  
**NUMARA ARALIĞI:** 37-47  
**AĞIRLIK:** 0.60 KG NO: 42  
**PRODUCT NAME:** 20kV ISOLATED ELECTRICAL SHOES  
**PRODUCT CODE:** FRANKLIN HRD052T  
**QUALITY STANDARD:** ISO 9001:2015 - EUROPEAN DIRECTIVE  
89/686/EEC  
**PRODUCT STANDARD:** EN 12568 - ISO 5423:92 - EN 344  
CSA Z KANADA STANDARDI - ASTM F2413-11 - EN ISO 20344  
EN ISO 20345 - EN ISO 13287 - CE  
**PRODUCT FEATURES:** SB - FO - E - P - WRU - HRO - SRC  
**USE VOLTAGE:** ASTM F2413-11 20kV 1 MINUTE  
C.S.A Z195 P.4.4 18kV 1 MINUTE  
**SIZE:** 37-47  
**WEIGHT:** 0.60 KG NO: 42

ON 300

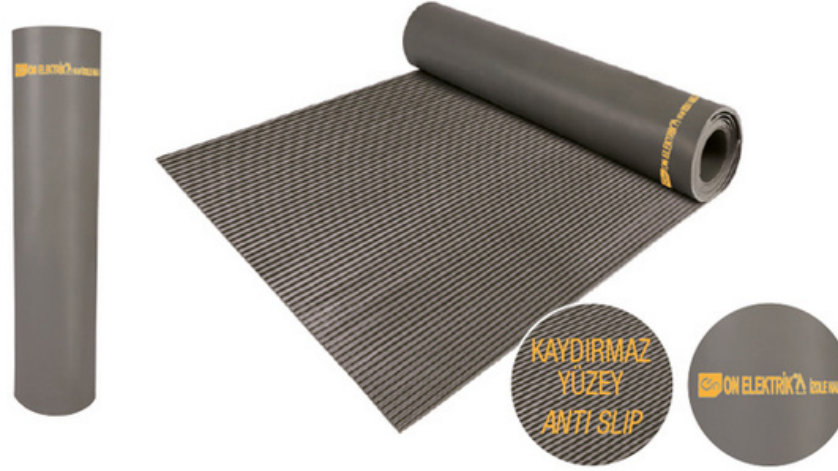

**ÜRÜN ADI:** 36000V İZOLE HALI 5 MM KALINLIK, GRİ RENK  
**ÜRÜN KODU:** ON 300  
**KALİTE STANDARDI:** ISO 9001:2015  
**ÜRÜN STANDARDI:** EN 61111 - EN 60243-1  
**KULLANIM VOLTAJİ:** 36000V CL: 4  
**ÖLÇÜLER:** EN: 120 CM'E KADAR BOY: 20 MT'YE KADAR  
TALEBE GÖRE ÖZEL ÖLÇÜ ÜRETİLİR

**PRODUCT NAME:** 36000V INSULATING MAT 5 MM  
THICKNESS, GREY COLOUR  
**PRODUCT CODE:** ON 300  
**QUALITY STANDARD:** ISO 9001: 2015  
**PRODUCT STANDARD:** EN 61111 - EN 60243-1  
**USE VOLTAGE:** 36000V CL: 4  
**SIZES:** WIDTH: UP TO 120 CM LENGTH: UP TO 20 MT  
SPECIAL SIZE IS PRODUCED BY REQUEST



Türkey

## A TİPİ FİBERGLAS MERDİVEN

### A TYPE FIBERGLASS LADDER

ÜRÜN ADI : A TİPİ FİBERGLAS MERDİVEN  
ÜRÜN KODU : 7300 SERİSİ  
KALİTE STANDARDI : OSHA  
ÜRÜN STANDARDI : ANSI A14.5 (2007)  
KULLANIM VOLTAJİ : 90 kV

PRODUCT NAME : A TYPE FIBERGLASS LADDER  
PRODUCT CODE : 7300 SERIES  
QUALITY STANDARD : OSHA  
PRODUCT STANDARD : ANSI A14.5 (2007)  
USE VOLTAGE : 90 kV




| Model No | Yükseklik<br>(Height) | Taşıma<br>Kapasitesi<br>(Load<br>Capacity) | Ürün Ağırlığı<br>(Product<br>Weight) | Ayak Açılış<br>Mesafesi<br>Yaklaşık<br>(Approx.<br>Spread) | Basamak<br>Sayısı<br>(Ladder Step<br>Number) |
|----------|-----------------------|--------------------------------------------|--------------------------------------|------------------------------------------------------------|----------------------------------------------|
| 7304     | 1.20 Mt               | 170 Kg                                     | 7.26 Kg                              | 75.6 Cm                                                    | 3                                            |
| 7306     | 1.80 Mt               | 170 Kg                                     | 10.20 Kg                             | 106.7 Cm                                                   | 5                                            |
| 7308     | 2.40 Mt               | 170 Kg                                     | 14.10 Kg                             | 139 Cm                                                     | 7                                            |
| 7310     | 3.00 Mt               | 170 Kg                                     | 18.40 Kg                             | 169.2 Cm                                                   | 9                                            |
| 7312     | 3.70 Mt               | 170 Kg                                     | 23 Kg                                | 200 Cm                                                     | 11                                           |

876001 TST NS  
DIELECTRIC E



**ÜRÜN ADI:** 36 kV İZOLELİ ELEKTRİKÇİ ÇİZMESİ (KOMPOZİT BURUN)  
**ÜRÜN KODU:** 876001 TST NS DIELECTRIC E  
**KALİTE STANDARDI:** ISO 9001:2015  
EUROPEAN DIRECTIVE 89/686/EEC  
**ÜRÜN STANDARDI:** EN ISO 20345 - EN 50321-1 - EN ISO 20344  
EN 13287 - CE  
**ÜRÜN ÖZELLİKLERİ:** SBE - HRO - SRC  
**KULLANIM VOLTAJİ:** 36 kV TABAN VOLTAJİ / 10 kV KENAR VOLTAJİ  
**UZUNLUK:** 37 CM  
**NUMARA ARALIĞI:** 36-49/50  
**AĞIRLIK:** 1.91 KG / ÇİFT - NO: 42  
**PRODUCT NAME:** 36 kV INSULATED ELECTRICAL BOOTS (SAFFETY TOE CAP)  
**PRODUCT CODE:** 876001 TST NS DIELECTRIC E  
**QUALITY STANDARD:** ISO 9001:2015  
EUROPEAN DIRECTIVE 89/686/EEC  
**PRODUCT STANDARD:** EN ISO 20345 - EN 50321-1 - EN ISO 20344  
EN 13287 - CE  
**PRODUCT FEATURE:** SBE - HRO - SRC  
**USE VOLTAGE:** 36kV BESA VOLTAGE / 10kV EDGE VOLTAGE  
**LENGTH:** 37 CM  
**SIZE:** 36-49/50  
**WEIGHT:** 1.91 KG / PAIR - NO: 42

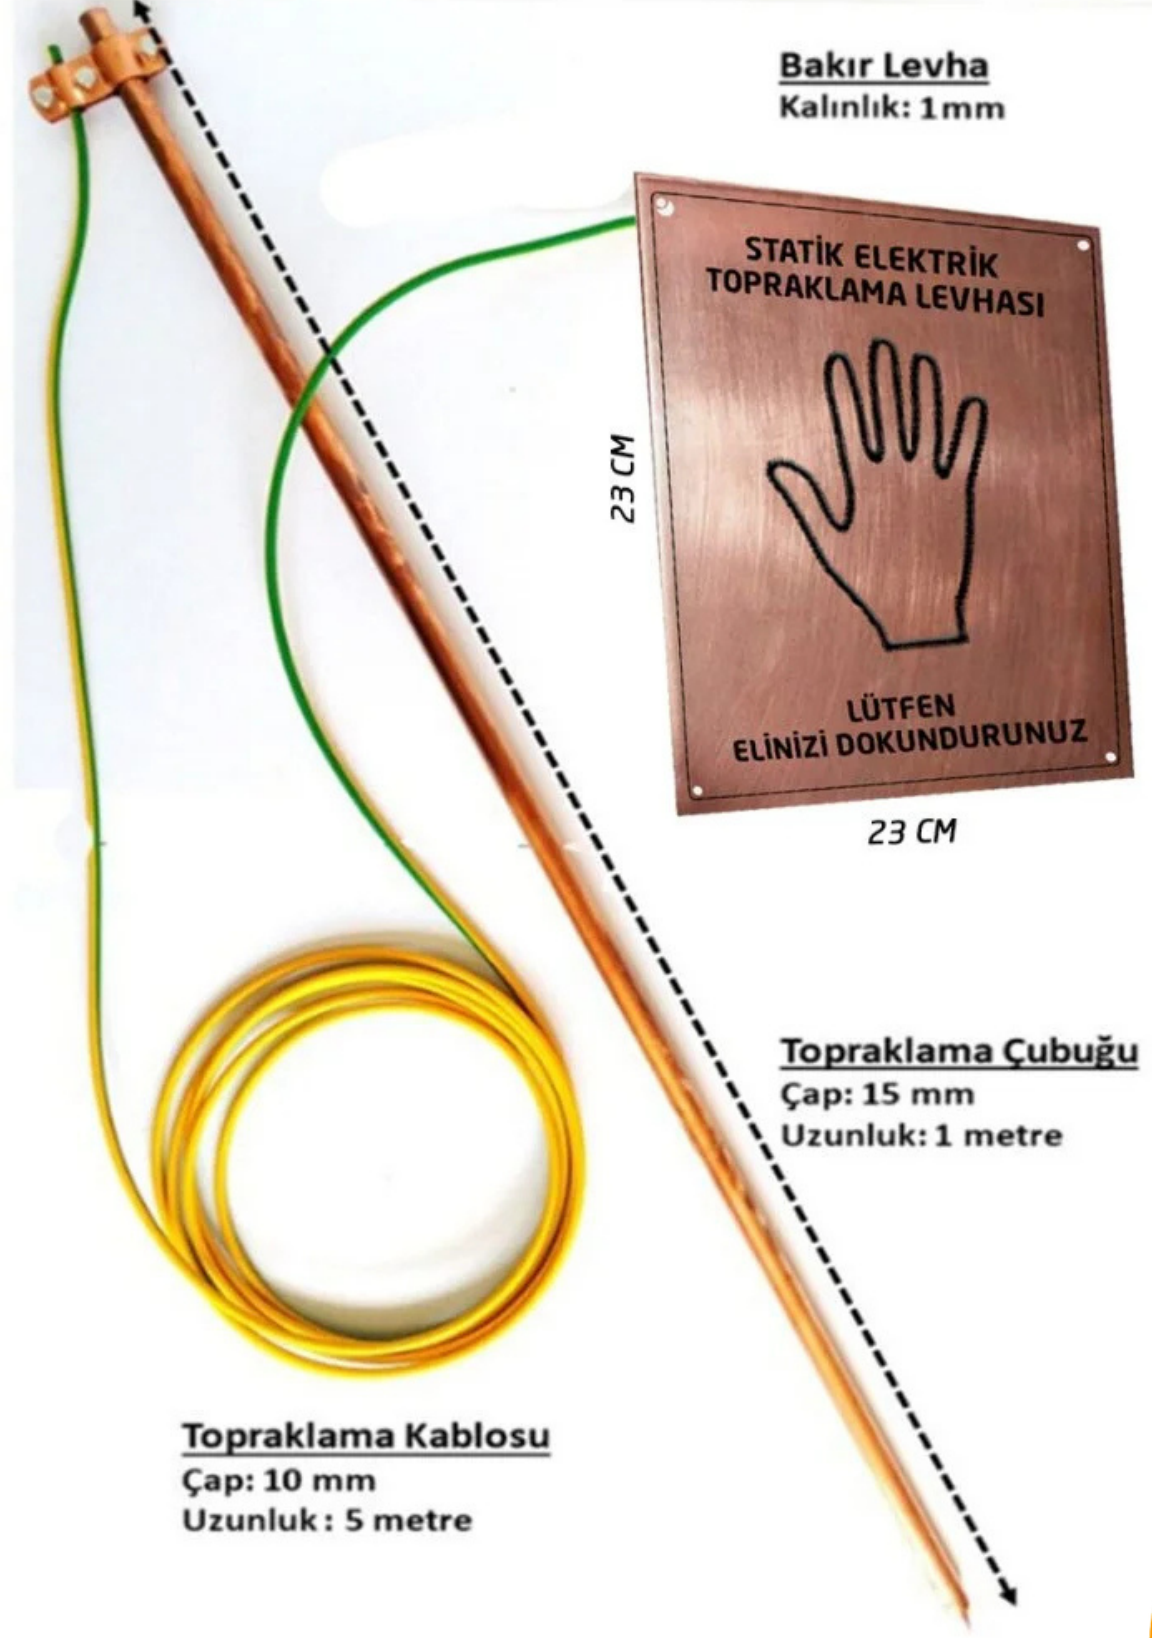

## Ayakak - Ađa ve Ađa Direklere Tırmanmak İin



0507 701 70 69 - info@ulasisguvenligi.com

565101



**ENHA**  
ROCKMAN

**ÜRÜN ADI:** 30 kV ELEKTRİKÇİ BARETİ (STANDART TİP)  
**ÜRÜN KODU:** 565101 ....(RENK KOD)  
**KALİTE STANDARDI:** ISO 9001:2015  
**ÜRÜN STANDARDI:** EN 397 - EN 50365 - ANSI Z89 - CE  
**KULLANIM VOLTAJİ:** 20 kV  
**TEST VOLTAJİ:** 30 kV  
**RENK:** BEYAZ(B), KIRMIZI(K), MAVİ(M), SARI(S), TURUNCU(T),  
PARLAK TURUNCU(RT)  
**AĞIRLIK:** 0.315 KG

**PRODUCT NAME:** 30 kV ELECTRICAL INSULATION HELMET  
(STANDARD TYPE)  
**PRODUCT CODE:** 565101....(COLOUR CODE)  
**QUALITY STANDARD:** ISO 9001:2015  
**PRODUCT STANDARD:** EN 397 - EN 50365 - ANSI Z89 - CE  
**USE VOLTAGE:** 20 kV  
**TEST VOLTAGE:** 30 kV  
**COLOUR:** WHITE(B), RED(K), BLUE(M), YELLOW(S),  
ORANGE(T), BRIGHT ORANGE(RT)  
**WEIGHT:** 0.315 KG



# Etiketleme - Kilitleme Ekipmanları

ON 8312



**ÜRÜN ADI:** 130 x 60 MM KİLİT TOPLAYICI  
**ÜRÜN KODU:** ON 8312  
**ÜRÜN STANDARDI:** 2001/95/EC CE  
**ÜRÜN ÖLÇÜSÜ:** 130 MM BOY x 60 MM GENİŞLİK x 39 MM ÇENE ÇAPI  
6 DELİKLİ

*PRODUCT NAME:* HASP LOCK 130 x 60 MM  
*PRODUCT CODE:* ON 8312  
*PRODUCT STANDARD:* 2001/95/EC CE  
*PRODUCT SIZE:* 130 MM LENGTH x 60 MM WIDTH x 39 MM JAW  
DIAMETER SIZE - 6 HOLES

ON 424



ÜRÜN ADI: AG/OG İKAZ BANDI

ÜRÜN KODU: ON 424

ÜRÜN ÖLÇÜSÜ: GENİŞLİK: 15 CM UZUNLUK: 250 METRE (±)

PRODUCT NAME: LOW/HIGH VOLTAGE VARNING TAPE

PRODUCT CODE: ON 424

PRODUCT SIZE: WIDTH: 15 CM LENGHT: 250 METRE (±)



Türkey

ON-408 SERİSİ



ÜRÜN ADI: ÖLÜM TEHLİKE LEVHASI  
ÜRÜN KODU: ON-408 SERİSİ

PRODUCT NAME: DANGER SIGN  
PRODUCT CODE: ON-408 SERIES

| Ürün kodu<br>Product code | Ürün cinsi<br>Product code | Ürün ebatı<br>Product code |
|---------------------------|----------------------------|----------------------------|
| ON 408 TM                 | METAL / METAL              | 15 CM x 23 CM              |
| ON 408 TY 1520            | YAPIŞKANLI / STICKY        | 15 CM x 20 CM              |
| ON 408 TY 2535            | YAPIŞKANLI / STICKY        | 25 CM x 35 CM              |



# Eureka Elektrik Arkından Koruyucu Eldiven 13-4HFR



**ATPV <30 Cal/cm2 Yüksek seviye kesilmeye ve ısı ve alev dayanıklı olarak elektrik arkından korunmak üzere tasarlanmıştır.**

**Eldiven, ark flaşı, alev geciktirici ve kesme direnci için tasarlanmıştır.**

**Ark parlaması, ASTM 2675 göre 23 Cal/cm<sup>2</sup> değere sahiptir.**

**100°C temas ısısına karşı dayanıklıdır.**

**Avuç içi orta derecede nefes alma özelliklerine sahiptir.**

**Az miktarda çinko organik Hızlandırıcılar içerir.**

**Manşet elastik bant ve çok az miktarda polyester kaplı ham kauçuk içerir.**

**EU 2016/425 Kişisel Koruyucu Donanım sınıfına giren özel tasarım eldivenlerdir.**

**CE işareti taşır ve CAT II'ye uygundur.**

**EN 407 ve EN 388 standartlarına uygun olarak üretilmiştir.**

# UYARI LEVHALARI

